




Dimensions Unit: Inch (mm)

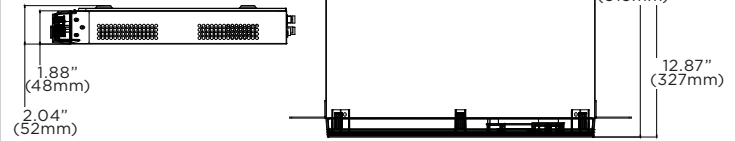

Summary

VMAX[®] A1 Plus[™] DVRs support HD-Analog and HD-TVI signals up to 5MP and CVBS up to 960H. The DVRs offer a seamless upgrade to HD resolution for new ROI from existing coaxial infrastructure. The VMAX[®] A1 Plus[™] can record 1080p video at real-time 30fps. Up the Coax (UTC) remote configuration is available with all compatible cameras. The 16-channel DVR is available with up to 20TB of storage.

Features

- Universal HD over Coax[®] DVR records HD-Analog and HD-TVI and all analog up to 960H signals
- Advanced H.264 Linux[®] embedded DVR
- 16-channels, real time 30fps recording up to 1080p
- Up to 5MP recording resolution at a total 160fps
- PathFinder[™] auto port forwarding
- C₃[™] CMS and event server software up to 144 channels
- Event camera group recording
- Complete system analysis with real-time system and network status monitoring
- Mobile Application for iPhone[®], iPad[®], iPod[®], Android[®] Smart Phones and Tablets and Apple TV[®]
- Mac[®] compatible remote ACS software
- OSD and PTZ control via coax (UTC)
- Signal hybrid detects any camera at any output automatically.
- Instant channel swap, no need to disconnect or reboot the DVR.
- Snapshot Notify[™]: camera notifications sent to an e-mail or CMS
- 4K (3840 x 2160) True HD, VGA and Spot video outputs
- 2TB - 10TB storage options
- HDD calculation and auto recording configuration
- Thumbnail search with hour and 5-minute previews
- 10 second jump buttons for playback and fast forward
- Event notifications via e-mail, text and C₃[™] CMS and push notifications to mobile devices
- Multiplex - live, playback, recording, backup, network, configuration
- 4 audio input, 1 audio output
- 4 sensor input, 1 relay output
- Digital spot monitoring output at D1 resolution
- Simple and free DDNS service
- Push notifications via DW[®] Mobile[™]
- Easy web-based client with multi-user access
- Help menu on major functions
- Auto and manual firmware upgrades
- 5 year limited warranty

Available Models

- DW-VA1P162T - 2TB, 16CH
- DW-VA1P163T - 3TB, 16CH
- DW-VA1P164T - 4TB, 16CH
- DW-VA1P166T - 6TB, 16CH
- DW-VA1P168T - 8TB, 16CH
- DW-VA1P1610T - 10TB, 16CH
- DW-VA1P1612T - 12TB, 16CH
- DW-VA1P1616T - 16TB, 16CH
- DW-VA1P1620T - 20TB, 16CH

Specifications

VIDEO			
Operating system	Embedded Linux [®]		
System	channel	16CH	
	Signals supported	Analog signal up to 960H, HD-Analog and HD-TVI up to 5MP	
Video-out	Monitor	True HD, VGA and Spot outputs	
	Framerate	480fps	
	Resolution	HDMI: 2560x1440, 3840x2160 (4K), 800x600, 1024x768, 1280x1024, 1920x1080 VGA: 800x600, 1024x768, 1280x1024, 1920x1080 Spot: D1	
Audio	Screen mode	1, 4, 6, 9, 10, 13 & 16	
	Input	4 Inputs	
Alarm	Output	1 output	
	Codec	ADPCM	
Serial	Alarm input	4 inputs	
	Alarm output	1 output	
User interface	1x RS485 for keyboard and PTZ control		
PERFORMANCE	Graphical user interface (GUI), IR remote control, USB mouse		
Recording	Compression	H.264	
	Recording mode	Continuous, schedules, sensor-activated, motion detection, pre and post alarm, emergency, quick backup	
	Pre recording	0- 5sec	
	Post recording	0-5min	
	Recording rate	960x480/576 (960H): 480fps	
		1280x720 (HD): 480fps	
Playback	1920x1080 (HD): 480fps		
	2560x1600 (4MP): 240fps		
	2560x1944 (5MP): 160fps		
	Recording resolutions	354 x 240, 720 x 480, 960 x 480, 1280x720, 1920x1080, 2560x1600, 2560x1440, 2560x 1944	
	Playback rate	960x480/576 (960H): 480fps	
Storage	1280x720 (HD): 480fps		
	1920x1080 (HD): 480fps		
	2560x1600 (4MP): 240fps		
Features	2560x1944 (5MP): 160fps		
	Playback resolution	1, 4, 9 & 16 Ch at 1080P (up to 4K 3840x2160)	
	Fast forward functions	x1, x2, x4, x8, x16, x32	
	Playback functions	Intelli-search by time bar, calendar (date and time), event search and thumbnail search	
Network	HDD interface	1x SATA HDD	
	Max. internal storage	20TB	
Features	HDD interface type	SATA	
	HDD health check	Temperature, S.M.A.R.T. with e-mail notifications	
	Camera color control	Via UTC	
Access	Digital zoom	Live and playback	
	Software upgrade	USB flash drive, network upgrade, FTP remote upgrade	
	Mobile client	Mobile app for Apple [®] & Android [®] smart phones & tablets	
	Covert channel	Yes	
Network features	Settings import/export	Import and export DVR settings	
	LAN	Ethernet (1x gigabit)	
Streaming	Transmission speed live	960x480/576 (960H): 480fps	
		1280x720 (HD): 480fps	
		1920x1080 (HD): 480fps	
		2560x1600 (4MP): 240fps	
		2560x1944 (5MP): 160fps	
Protocol	Web viewer	Fixed IP, DHCP, UPnP, DDNS	
		Client monitoring software	Live, playback and configuration up to 10 multiple connections
Network features	Access	Mac [®] (Apple [®] S/W), C ₃ [™] (CMS S/W)	
		Network features	Dual stream, separate local recording and network transmission
			Network bandwidth control (25 Kbps - 1000 Mbps)
Backup device	System recovery after power failure	Time synchronization by NTP server ("pool.ntp.org")	
		Remote & E-mail notification, remote system reboot by IE, remote PTZ control	
GENERAL	Operating temperature and humidity	PathFinder [™] P2P service (auto port forwarding)	
		Local backup by USB and CMS over the network and FTP	
Power requirements	Power consumption	Auto-reboot and journaling file system	
		DC12V	
Weight	Dimension (W x D x H)	60W, 5A	
		15.15" x 12.4" x 1.88" (385 x 315 x 48 mm) (1U)	
Warranty	Weight	4.4 lbs (2kg)	
		5 year limited	

